

The REM 1050 duplex slitter rewinder converts thin gauge films utilizing programmed pneumatic rider rolls on the rewind to prevent air entrapment, while winding to assure uniform-quality wound rolls. The REM 1050 is ideally suited for slitting narrow web widths, especially with foils and other sensitive materials.

1050

[narrow slits for film & foil]


Integral unwind stand mounted to a common base

Pneumatic unwind brake with constant tension control

Constant Torque rewind

Intuitive operator interface



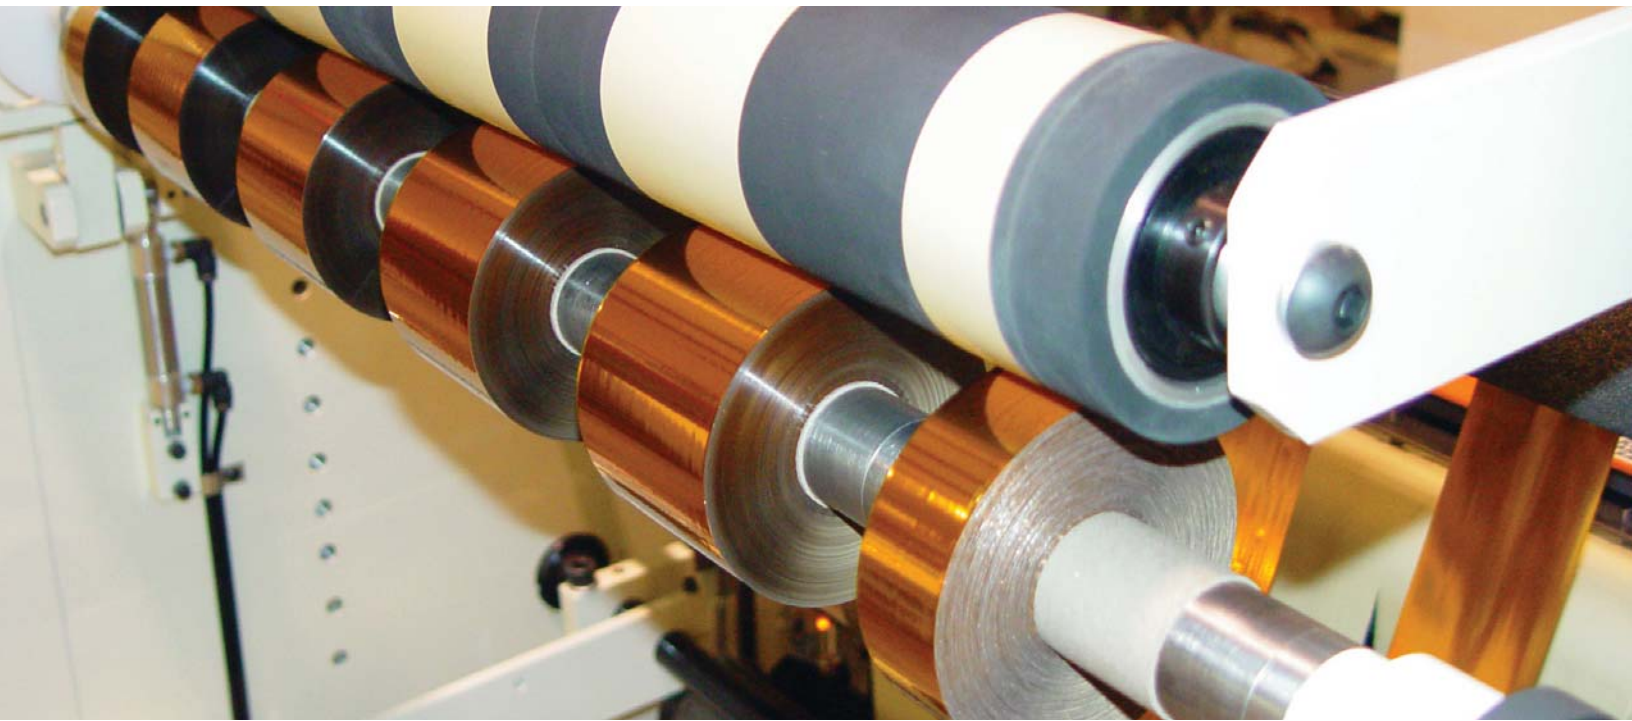

Unwind
30"

Rewind
24"

Web Width
30 | 40 | 50"

Speed
1,000 fpm

Shaft Type:

- Differential Cam-Lock [Optional: Differential DXF, Locked Core]
- Cantilevered [Optional: Flanged, Lift-out]

Winding Methods:

- Center
- Rider-Roll Minimum Gap

Slitting Methods:

- Tangential Shear
- Wrap Shear
- [Optional: Razor]

Optional Accesories:

- Roll Unloading Tree
- Roll Pusher
- Static Control
- Pneumatic Splice Tables
- Trim Winders
- Line Guide

